KOHLER®

Roughing-In

K-3503
DEVONSHIRE®
COMFORT HEIGHT® TOILET

Product Information

Applicable product:	
Two-piece elongated toilet	K-3503
ADA compliant (when installed following installation notes).	**ADA**

Fixture:	
Configuration	two-piece, elongated
Water per flush	1.6 gal (6 L) or 1.4 gal (5.3 L)
Passageway	2-1/8″ (5.4 cm)
Water area	11-3/4″ (29.8 cm) x 9-1/4″ (23.5 cm)
Water depth from rim	6″ (15.2 cm)
Seat post hole centers	5-1/2″ (14 cm)

Included components:	
Elongated bowl	K-4288
Toilet tank with left-handed trip lever	K-4708
Tank cover	1044820
Trip lever	85086
Bolt cap accessory pack	1013092
Tank attachment kit	1016548

Installation Notes

Install this product according to the installation guide.

Will comply with the American Disabilities Act (ADA) when installed per the requirements of the Accessibility Guidelines, Section 604 Water Closets, of the Act, which include the installation of an open front seat.

Section 604 states the required height of the toilet is 17″ (43.2 cm) to 19″ (48.3 cm) from the floor to the top of the seat to meet ADA requirements.
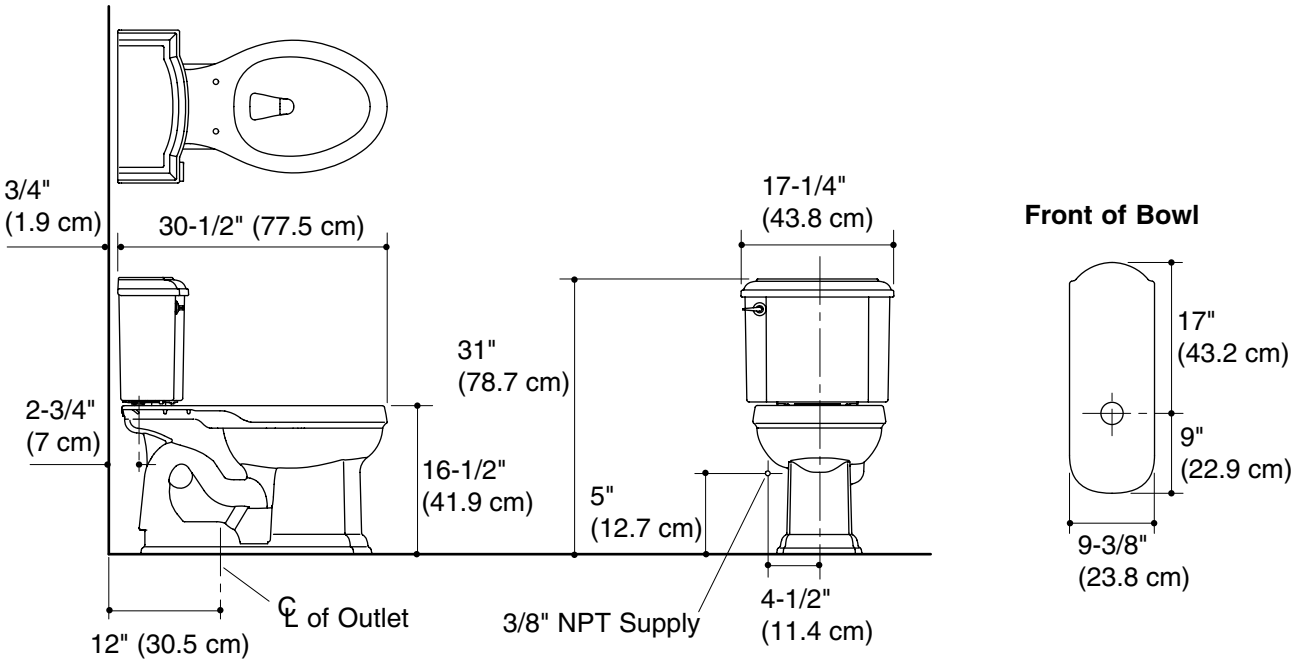
Fixture conforms to ASME Standard A112.19.2/CSA B45.1. All dimensions are nominal.